




Mounting Extensions

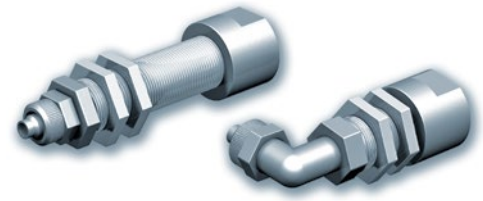


The L series extensions are used for gripping on various levels using the same installation plate. These extensions are adjustable to different heights.

This system is especially useful for 2.5 bellows type suction cups, as height adjustment is made easier by the deflection of the suction cup.

Spring systems should be chosen, instead, for flat suction cups with low deflection.

Materials

Threaded rod and nut Brass
Screwed vacuum fitting Nickel-plated brass

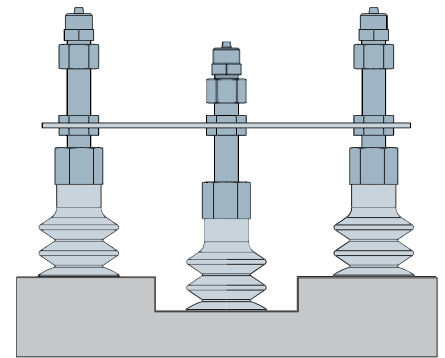

4

Characteristics



Models	A ⁽¹⁾			B	C	h		Ød	ØL	D	P
G1/8"-M	22	42	52	25	19	3	14	6	G1/8"-M	-	-
G1/4"-M	19	49	69	29	24	4	19	9	G1/4"-M	-	-
G3/8"-F	19	49	69	20.5	19.5	4	23	-	G3/8"-F	19	22
G3/8"-M	19	49	69	20.5	19.5	4	23	10	G3/8"-M	-	-

(1) Other lengths available on request for a minimum quantity of 10 pieces.

G1/4"-M - G1/8"-M


Straight

Elbow

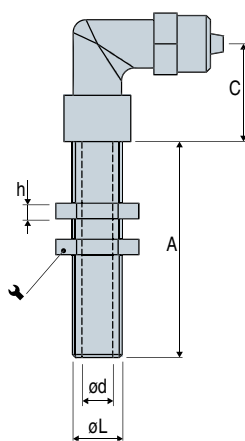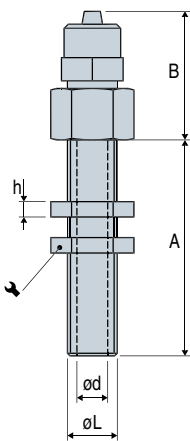


G3/8"-F

Straight or elbow 6x8

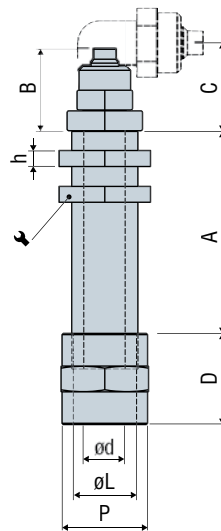

G3/8"-M

Straight or elbow 6x8

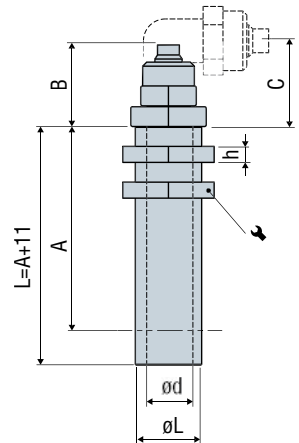

Note: All dimensions are in mm



Please specify the part:
Model + Thread + Adjustable stroke + Fitting + Suction cup fitting
 e.g.: L1449C68F

1: Model	2: Thread	3: Adjustable stroke	4: Fittings	5: Suction cup fitting G3/8" version	
L	18 G1/8"	22 - 42 - 52	G1/8"	D46 Straight 4 x 6	F Female
	14 G1/4"		G1/4"	D68 Straight 6 x 8	
	38 G3/8"	19 - 49 - 69	G3/8"	C46 Elbow 4 x 6	M Male
				C68 Elbow 6 x 8	
				N Without fitting	

G3/8" extensions are compatible with the High Performance C series range of suction cups (see page 2/55).