

# COVAL

vacuum managers

## MPXS

Controlled Communicating Micro Vacuum Pumps



 IO-Link

 AIR Saving Control

## ADVANCED VACUUM SOLUTIONS

[www.coval.com](http://www.coval.com)

EN1

# MPXS

## Controlled Communicating Micro Vacuum Pumps

### General Information

The **MPXS series** micro vacuum pumps represent a significant advancement in vacuum handling technology. Their ultra-compact and lightweight design makes them ideal for integration close to suction cups on robots or automated systems. This proximity, combined with the integrated single-stage Venturi technology, reduces cycle times and meets the demands of high-speed applications, particularly in the plastics, electronics, and pharmaceutical sectors.


Equipped with Air Saving Control (ASC) vacuum regulation technology, the **MPXS** micro vacuum pumps ensure an average energy saving of 90%. They also feature built-in diagnostic tools and an IO-Link communication interface, ensuring simple and effective integration into connected production processes.

The modularity of the **MPXS** series offers a wide range of configurations, providing great flexibility in installation and use to adapt to the varied needs of industrial applications.

COVAL's **MPXS** micro vacuum pumps are the ideal solution to optimize your gripping processes, offering unmatched performance, efficiency, and adaptability for demanding industrial applications.



Industry-specific applications



Full scale



### Main Features

- Ultra-compact and lightweight: 12.5 mm wide and 87 g minimum.
- Maximum vacuum: 85%.
- Suction flow rates: - Nozzle Ø 0.7 mm → 15 NI/min  
- Nozzle Ø 1.0 mm → 26 NI/min
- Vacuum control: NC (Normally Closed) or NO (Normally Open).
- Standard or adjustable powerful blow-off, controlled or automatic timed.
- Vacuum check valve.
- Integrated open silencer or exhaust collector.
- Standalone micro vacuum pumps or bankable from 1 to 8 modules with common pressure and collectable exhaust.
- High-visibility display with clear multilingual messages and simplified setup menu.
- Electronic vacuum switch and 24 V DC contact output.
- Standard Input/Output (SIO) / IO-Link mode.
- Intelligent vacuum regulation system ASC (Air Saving Control) ensuring an average energy saving of 90%.
- Power supply voltage monitoring.

### Applications

The compact and lightweight nature of the **MPXS Series** micro vacuum pumps allow installation as close as possible to the suction cups, thereby reducing cycle times and energy consumption.

They are ideal for high speed gripping applications:

- Plastics processing
- Electronics
- Pharmaceutical

...





#### Ultra-compact and lightweight design

- 12.5 mm wide
- 87 g minimum
- Volume: 74 cm<sup>3</sup>



#### Available configurations

- Standalone module
- Bank from 1 to 8 modules with common pressure and collectable exhaust



#### Simple and efficient HMI

##### Control status LEDs:

- Green LED: vacuum control
- Orange LED: blow-off control

##### 2 setting buttons

##### High-visibility display with clear messages and straightforward settings menu

##### Gripping status indicator light:

- Green: object gripped
- Yellow: ASC disabled due to vacuum leakage (object held in place)
- Red: object lost



#### Vacuum generation with single-stage Venturi pump

- Short evacuation times
- No moving parts
- Dust resistant
- No maintenance required



#### Onboard diagnostic tools

- Cycle counters (vacuum and blow-off control, objects gripped, objects lost, etc.)
- Alarm counters
- Supply voltage monitoring



#### Inputs / Outputs Digital (SIO) / IO-Link

- One M8 6-pin connector male A coded



Vacuum check valve



Air Saving Control (ASC), our smart vacuum control system: Averages 90% energy savings



IO-Link communications interface: allows for simple and efficient integration of MPXS micro vacuum pumps into the process

Open clog-free silencer or exhaust collector depending on the version

#### High-visibility display



Multilingual alert and/or setup messages

EN FR DE IT ES

 **IO-Link active**

ASC (Air Saving Control) Indicator: active vacuum regulation

Instantaneous vacuum level (in kPa, % of vacuum, mbar, or inHg)




#### Integrated Functions

The **MPXS Series** micro vacuum pumps integrate all the necessary functions into a compact footprint for a simple, efficient solution adapted to each application:

- ❶ Vacuum solenoid valve
- ❷ Single-stage Venturi pump
- ❸ Open silencer or exhaust collector
- ❹ Vacuum check valve
- ❺ Electronic vacuum switch
- ❻ Integrated electronics
- ❼ Blow-off solenoid valve
- ❽ 200 µm filter screen

**+ AIR Saving Control**  
**90%** energy savings  
(on average)

The combined action of the non-return valve ❹ and of the integrated electronics ❻ automatically ensures ASC management.  
→ Once the vacuum has been established, the pump does not consume any more air to hold the object.

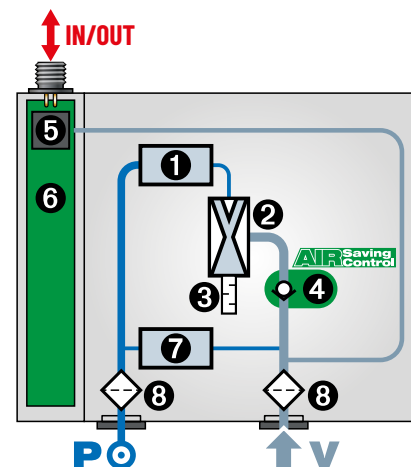





#### Performance Determined by the Venturi Pump's Nozzle Diameter

The table specifies the performance levels and evacuation times generated for each nozzle diameter available.

When handling air tight objects, the ASC vacuum control system can help to considerably reduce the consumption of compressed air.


Vacuum reached Nozzle dia. (mm)	Evacuation time <sup>(1)</sup> (s) of a volume of 5 cl <sup>(2)</sup>				Max. vacuum (%)	Air drawn in (NI/min)	Air consumed (NI/min)	Air pressure level (bar)
	50%	60%	70%	80%				
0.7	0.15	0.25	0.42	0.70	85	15	22	3.7
1.0	0.09	0.14	0.24	0.37	85	26	44	3.7

(1) Out of valve response time. (2) Example of a 5 cl volume: 4 suction cups 1.5 bellows Ø 25 (VSA25) + 4 airlines 4x6 mm lg 600 mm + 1 airline 4x6 mm lg 500 mm.

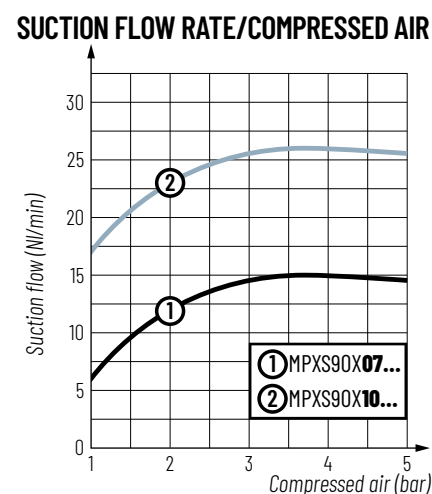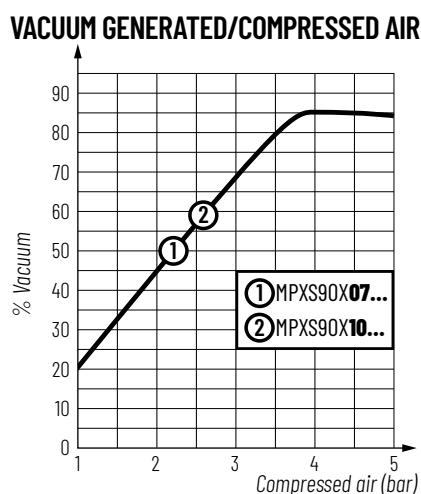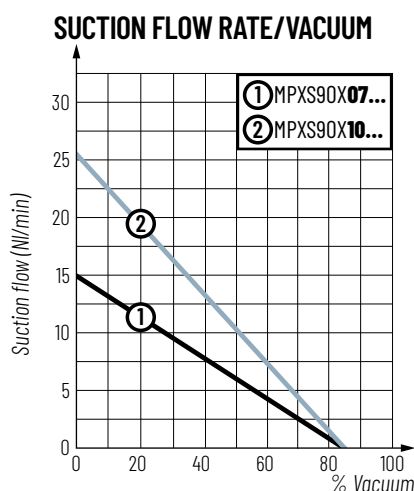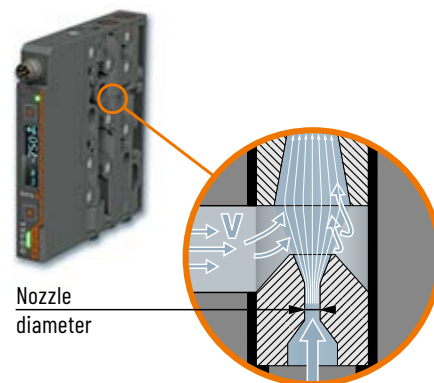



#### Averages 90% Energy Savings

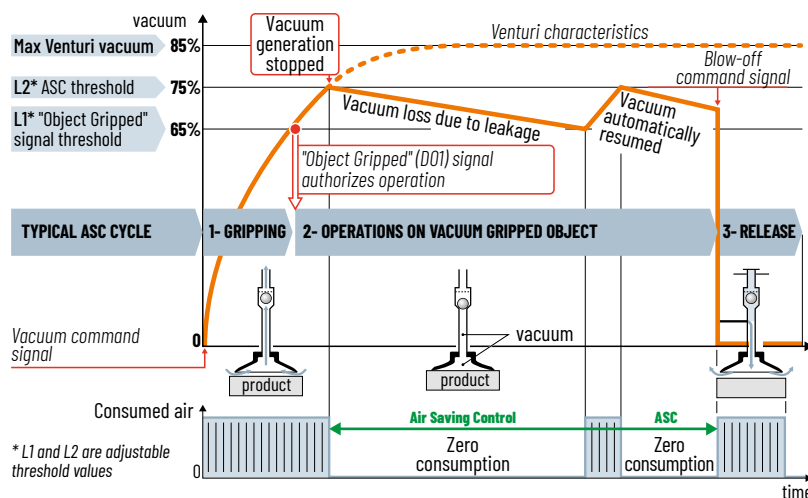

Air Saving Control (ASC) is a smart vacuum control system that stops the consumption of compressed air as soon as the required level of vacuum is reached, thus avoiding any unnecessary consumption and contributing to savings on the equipment's operating costs.

For airtight objects the MPXS micro vacuum pumps automatically execute the above ASC cycle, leading to maximal energy savings according to the following 3 phases:

1. Object is gripped: vacuum generated by the Venturi pump.
2. Operations on object held in place by vacuum: at the L2 vacuum threshold (75%), the supply of the Venturi pump is cut off → the consumption becomes zero; the object remains held in place due to the non-return valve. Microleaks will generally cause the vacuum level to fall slowly. Each time it falls below L2 (75%) by more than the hysteresis value, vacuum generation is briefly resumed until it reaches threshold L2.
3. Object is released: by an external or an automatic timed blow-off command (according to the settings).

#### 1- Gripping + Transfer (nozzle dia. 1 mm, emptying 0.3 l)

Phase	Duration	Air consumption		Energy savings achieved
		without ASC	with ASC	
Gripping	1.19 s	1.05 NI	1.05 NI	
Transfer	5 s	4.42 NI	0	
Release	0.2 s	0.05 NI	0.05 NI	
		5.52 NI	1.10 NI	80 %

#### 2- Clamping + Operations (nozzle dia. 1 mm, emptying 0.3 l)

Phase	Duration	Air consumption		Energy savings achieved
		without ASC	with ASC	
Clamping	1.19 s	1.05 NI	1.05 NI	
Operations	60 s	53 NI	0	
Release	0.2 s	0.05 NI	0.05 NI	
		54.10 NI	1.10 NI	98 %

#### → Resulting savings

ASC energy savings are major as shown in the 2 examples below:

- 80% savings when transferring a object after gripping.
- 98% savings when clamping a object during an operation lasting 1 min.


The investment generally pays for itself within a few months.

#### ENERGY SAVING APP

Calculate the savings you can generate with COVAL's ASC technology using the ENERGY SAVING APP available online.



#### Smart Adaptation

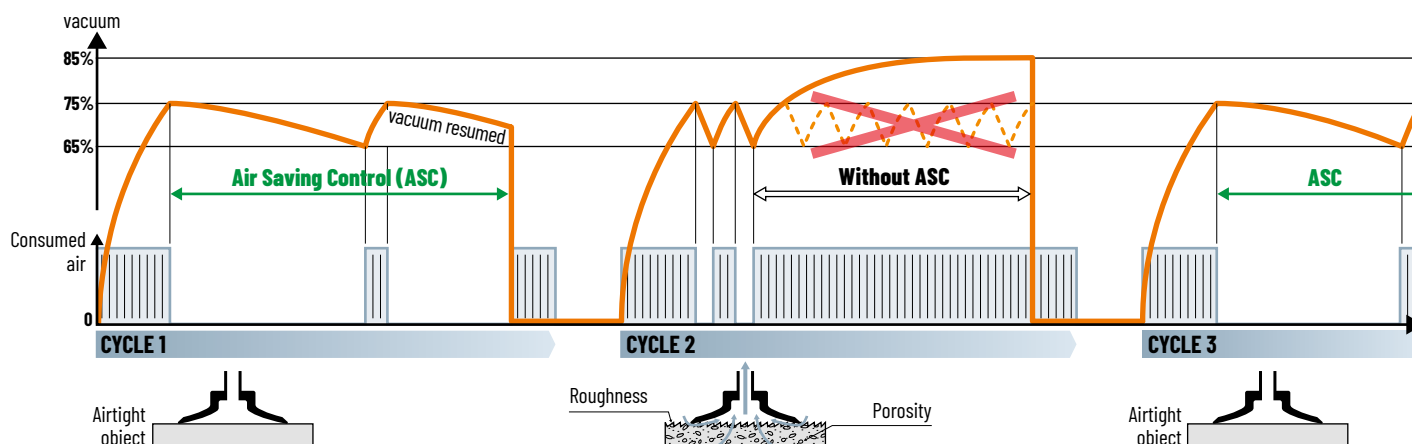

The above illustration shows the MPXS's ability to adapt. ASC operation is automatic for any object that is adequately airtight (cycle 1). Should a leakage occur (cycle 2), due to a rough or porous object, or due to a leak in the vacuum network, the vacuum pump would automatically detect the anomaly, complete the cycle

without ASC in order to keep production running, and report the situation for possible maintenance. Production keeps running. As soon as everything returns to normal (cycle 3), operation with ASC is automatically restored.



### Easier Integration, Use, and Diagnostics

The **MPXS** micro vacuum pump series includes various features that enable setup, use, and diagnostics in all situations and at all levels (operators, process, networked factory), with the

goal of keeping the use and management of the pumps as straightforward as possible, allowing for easy integration in your smart factory.

### Settings, Diagnostics, and Process Data



#### CONFIGURABLE SETTINGS

- Choice of language: EN, FR, DE, IT or ES.
- "Object Gripped" and ASC control thresholds.
- ASC vacuum control system management.
- Automatic blow-off.
- Vacuum measurement unit: kPa, %, mbar, inHg.



#### DIAGNOSTICS

- Cycle counters (vacuum and blow-off control, objects gripped, objects lost, etc.).
- Alarm counters (ASC errors, objects lost, high/low voltage, output overcurrent, etc.).
- Supply voltage monitoring.
- Software version.
- Product item number and serial number.



#### PROCESS INPUT DATA

- Vacuum and blow-off control.



#### PROCESS OUTPUT DATA


- Instantaneous vacuum level.
- Object gripped and object lost information.
- ASC vacuum control system status.
- Alarms (high/low voltage).

### HMI

The **MPXS** micro vacuum pump HMI allows for easy and efficient reading of the pump's operation.

The high-visibility display includes all required inputs for full operation:

- Main information is easy to read.
- Multilingual: EN - FR - DE - IT - ES.
- Simple and clear event messages.
- Settings and diagnostics menus.
- Configurable display orientation: 0 - 180°.
- Lockable to prevent undesired changes.

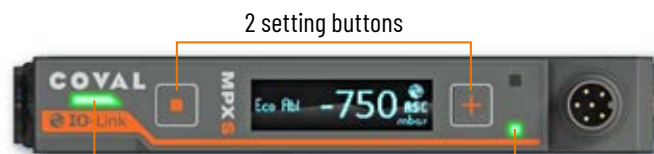

- Gripping status indicator light:
- Green: object gripped.
  - Yellow: ASC disabled due to vacuum leakage (object held in place).
  - Red: object lost.

- Control status LEDs:
- Green LED: vacuum control
  - Orange LED: blow-off control




### IO-Link

The IO-Link system provides efficient real-time communication between **MPXS** micro vacuum pumps and any higher-level protocol (EtherNet/IP, PROFINET, EtherCAT, etc.) required to monitor the production line. It can be used to control pumps, configure settings, and get feedback to ensure maximum productivity.

#### Advantages:

- Straightforward wiring, installation, and setup.
- Availability of diagnostic status data.
- Simpler preventive maintenance and vacuum pump replacement without manual setup, and more.

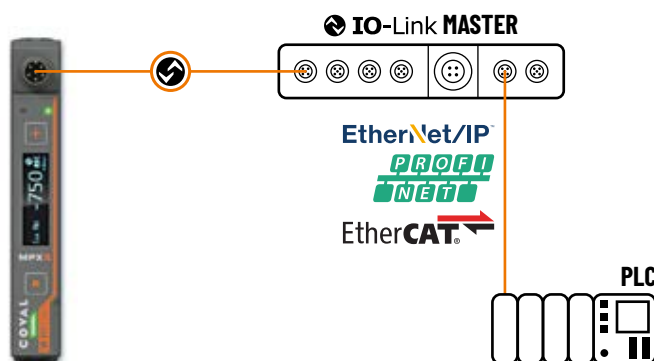





### Vacuum Control: 2 Solutions


#### Model MPXS\_S:

Vacuum pump with **NC** vacuum control and **NC** blow-off.

In the event of power failure, vacuum is no longer generated. In the event of compressed air failure, the vacuum is no longer maintained.


- NC blow-off and vacuum control: solenoid valves
- Choice of blow-off settings:
  - Controlled by external signal
  - Automatic timer from 50 to 9950 ms (advantage: saves one controller output).

**NC** vacuum control  
Standard blow-off (F1)



P: Pressure / Compressed Air V: Vacuum / Suction Cup E: Exhaust

**NC** vacuum control  
Adjustable powerful blow-off (F3)



#### Model MPXS\_V:


Vacuum pump with **NO** vacuum control and **NC** blow-off.

In the event of power failure, vacuum is still generated: object is held in place → fail-safe.

In the event of compressed air failure, the vacuum is no longer maintained.


- NO vacuum control solenoid valve.
- NC blow-off control solenoid valve.

**NO** vacuum control  
Standard blow-off (F1)



P: Pressure / Compressed Air V: Vacuum / Suction Cup E: Exhaust

**NO** vacuum control  
Adjustable powerful blow-off (F3)



### Blow-off Function

The MPXS micro vacuum pumps offer 2 blow-off versions to meet all application needs:


#### ■ Standard blow-off (MPXS\_F1 version)

The blow-off flow is directed into the vacuum network, ensuring the release of parts in most applications.

→ Network pressure (blow-off flow rate of 7 NI/min at 3.7 bar).

#### ■ Adjustable powerful blow-off (MPXS\_F3 version)


This blow-off version allows for very rapid release of parts in cases where the pump cannot be positioned close to the suction cups or to minimize cycle times. The MPXS\_F3 features an adjustment screw with a locking nut to tailor the power as needed. → Network pressure with amplification valve (adjustable blow-off flow rate from 16 to 55 NI/min at 3.7 bar).

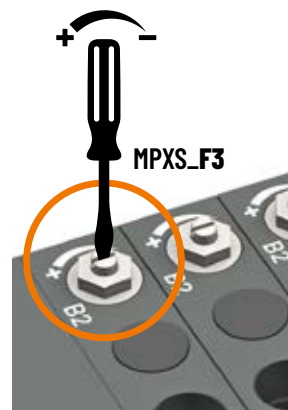

### Electrical Connections and Cables



One M8 6-pin connector male, A-Coded



IN / OUT

- 1 24 V DC
- 2 24V DC PNP suction command<sup>(1)</sup>
- 3 0 V - GND
- 4 24 V DC object gripped D01 - C/Q
- 5 24 V DC PNP blow-off command
- 6 /

⊗ : Connections for IO-Link

(1) 24 V DC suction command, depending on version:

- S: 24 V DC vacuum control
- V: 24 V DC vacuum off command



### Accessories for MPXS Micro Vacuum Pumps

#### Connection Cables

Part No.: CCM8F6PCM12M5PL05

M8 6-pin female snap-in elbow / M12 5-pin male straight connectors, AWG24, PUR, length 0.5 m.



Part No.: CCM86PCL2

M8 6-pin female snap-in elbow, AWG24, PUR, length 2 m.



## Controlled Communicating Micro Vacuum Pumps

### Configurations




#### Standalone vs Bank

Standalone **MPXS** micro vacuum pumps cater to the most common applications: a single micro vacuum pump controls one or several suction cups, all operating in the same sequence.


When multiple suction cups operate in different sequences, several micro vacuum pumps are needed, which can be configured as:

- Multiple standalone micro vacuum pumps;
- Or a bank consisting of 1 to 8 micro vacuum pumps with a shared internal pressure and a collectable common exhaust.

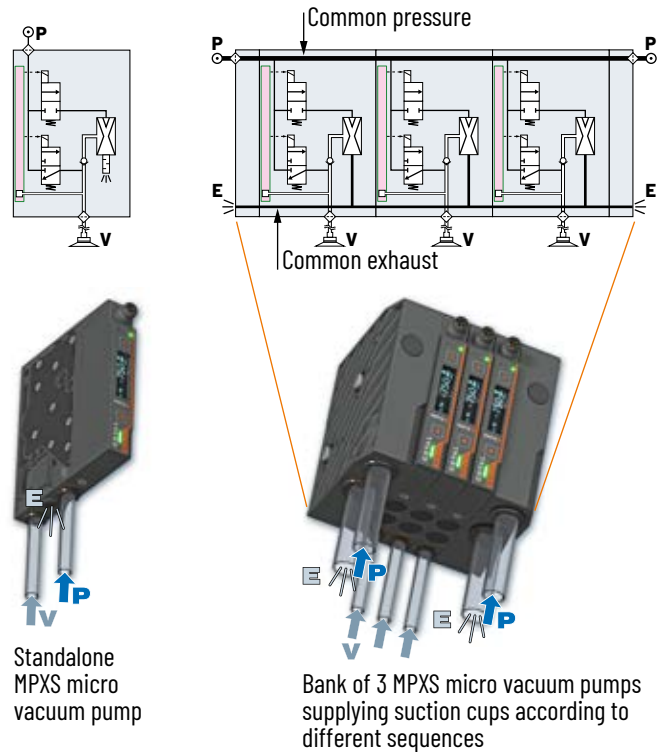

#### Standalone Version

- Ultra-thin and light

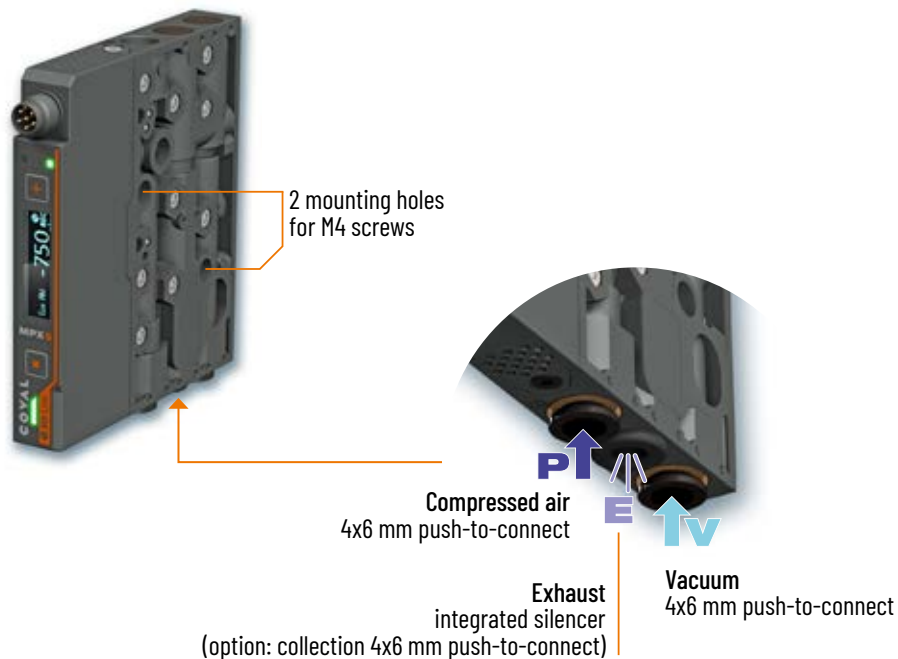






### Bankable Version


#### BANK EQUIPPED WITH SINGLE END SET - LEFT (MPXS\_\_\_B\_LX)

- Nozzle Dia. 0.7 mm: 1 to 8 modules per bank
- Nozzle Dia. 1.0 mm: 1 to 4 modules per bank
- 1 x Common Pressure
- 1 x Unrestricted and collectable exhaust

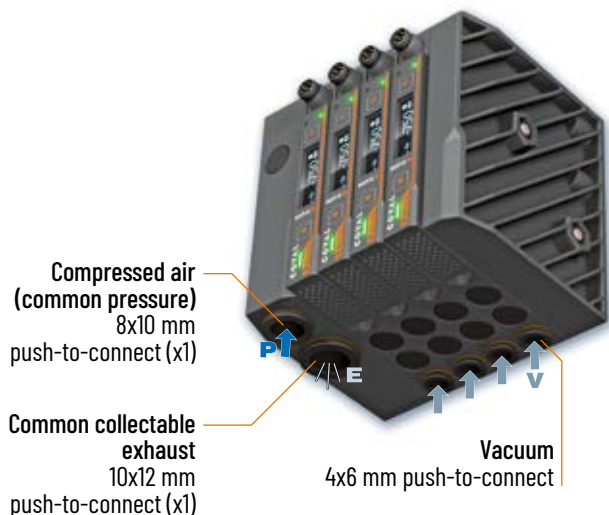

#### BANK EQUIPPED WITH DOUBLE END SET (MPXS\_\_\_B\_DX)

- 1 to 8 modules per bank
- 2 x Common Pressure
- 2 x Unrestricted and collectable exhaust

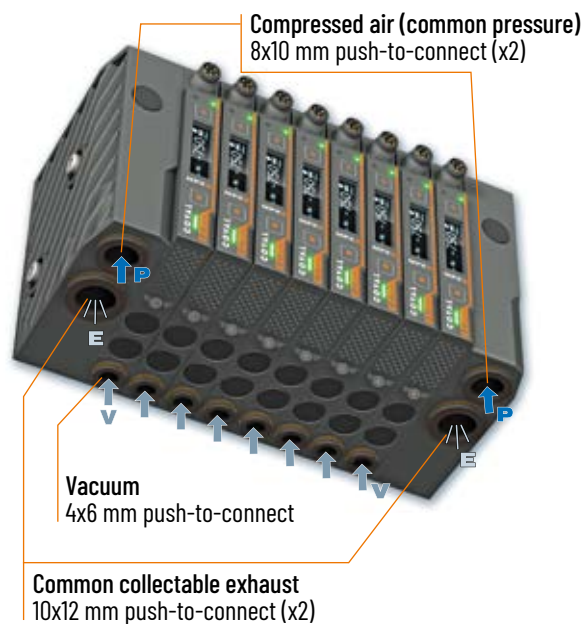

### Composition of Banks

Standard banks are composed of 1 to 8 identical **MPXS** vacuum modules in the **MPXS\_EB** version, an end set consisting of a head module and a tail module, and assembly screws corresponding to the number of modules in the bank.

The end sets are available in two versions:


- **Single** version – left: 1 x Common Pressure and 1 x Unrestricted and collectable exhaust
- **Double** version: 2 x Common Pressure and 2 x Unrestricted and collectable exhaust

Standard banks are cataloged and delivered assembled.

For banks composed of different **MPXS** vacuum modules, it is necessary to order the sub-assemblies separately:

- X **MPXS** micro vacuum pump modules for the bank (version **MPXS\_EB**)
- An end set for the bank
- An assembly screw kit

Specific banks are delivered unassembled.

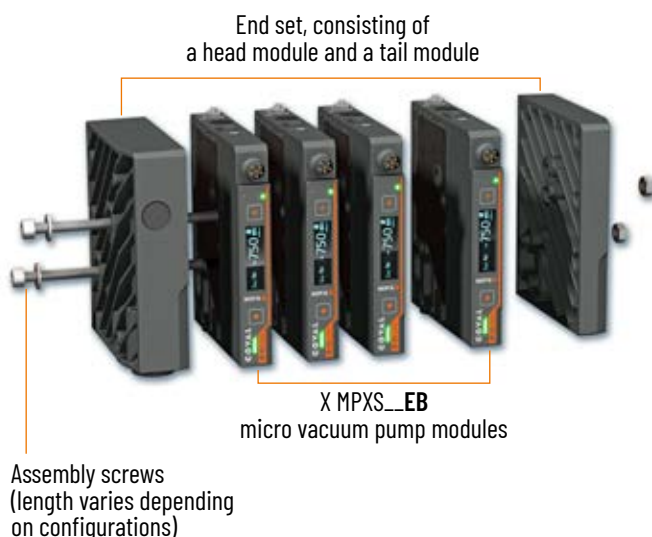

#### Completing a Bank

It is possible to add an **MPXS** micro vacuum pump to an existing bank by ordering the desired **MPXS** micro vacuum pump module in the **EB** version, along with the assembly screw kit corresponding to the new number of modules in the bank.







# MPXS

## Controlled Communicating Micro Vacuum Pumps

### Configuring a Vacuum Pump



#### STANDALONE MPXS MICRO VACUUM PUMP



 <b>MPXS90X 10 S C16 P R2 F1 E</b> 									
<b>NOZZLE DIA.</b>			<b>BLOW-OFF</b>				<b>EXHAUST COLLECTION</b>		
0.7 mm dia.			Standard blow-off				Without		
1.0 mm dia.			Adjustable powerful blow-off		With				
<b>GENERATOR CONTROL</b>									
Vacuum <b>NC</b> and blow-off <b>NC</b>				<b>S</b>					
Vacuum <b>NO</b> and blow-off <b>NC</b>				<b>V</b>					

Sample part number:

**MPXS90X07SC16PR2F1X**

MPXS Micro Vacuum Pump, maximum vacuum 85%, nozzle 0.7 mm dia., controlled by an NC vacuum solenoid valve and an NC blow-off solenoid valve, 1 M8 6-pin connector, with standard blow-off and open silencer.


#### MPXS MICRO VACUUM PUMPS IN BANK

 <b>MPXS90X 10 S C16 P R2 F1 EB4</b>										<b>L X</b>		
<b>NOZZLE DIA.</b>		<b>BLOW-OFF</b>		<b>NUMBER OF MODULES</b>		<b>BANK END SETS</b>						
0.7 mm dia. <b>07</b>		Standard blow-off <b>F1</b>		<b>EB1</b> Bank of 1 MPXS module		<b>L</b> <b>Single Left</b> End Set for a bank of 1 to 4 MPXS modules with a 1.0 mm nozzle, and up to 8 MPXS modules with a 0.7 mm nozzle.						
1.0 mm dia. <b>10</b>		Adjustable powerful blow-off <b>F3</b>		<b>EB2</b> Bank of 2 MPXS modules		<ul style="list-style-type: none"><li>▪ 1 x common pressure connection, push-to-connect 8x10 mm</li><li>▪ 1 x Exhaust collector, push-to-connect 10x12 mm</li></ul>						
<b>GENERATOR CONTROL</b>				<b>EB3</b> Bank of 3 MPXS modules								
Vacuum <b>NC</b> and blow-off <b>NC</b>				<b>EB4</b> Bank of 4 MPXS modules								
<b>S</b>				<b>EB5</b> Bank of 5 MPXS modules								
Vacuum <b>NO</b> and blow-off <b>NC</b>				<b>EB6</b> Bank of 6 MPXS modules								
<b>V</b>				<b>EB7</b> Bank of 7 MPXS modules								
				<b>EB8</b> Bank of 8 MPXS modules		<b>D</b> <b>Double</b> End Set for a bank of 1 to 8 MPXS modules. <ul style="list-style-type: none"><li>▪ 2 x common pressure connections, push-to-connect 8x10 mm</li><li>▪ 2 x Exhaust collectors, push-to-connect 10x12 mm</li></ul>						

Sample part number:

**MPXS90X10VC16PR2F3EB8DX**

Assembled bank of 8 MPXS modules, maximum



Sample part number:

**MPXS90X10VC16PR2F3EB8DX**

Assembled bank of 8 MPXS modules, maximum vacuum 85%, 1.0 mm nozzle, controlled by an NO vacuum solenoid valve and an NC blow-off solenoid valve, 1 M8 6-pin connector, with adjustable powerful blow-off and equipped with a double end set.



#### MPXS90X07SC16PR2F1EB4LX

Assembled bank of 4 MPXS modules, maximum vacuum 85%, 0.7 mm nozzle, controlled by an NC vacuum solenoid valve and an NC blow-off solenoid valve, 1 M8 6-pin connector, with standard blow-off and equipped with a simple left end set.



### Accessories

#### Mounting Accessories for Standalone MPXS Micro Vacuum Pumps

- Part No. **MPXFIXA**  
Front panel installation kit for standalone MPXS module (1 plate + 4 fastening screws)
- Part No. **MPXFIXB**  
DIN rail installation kit for standalone MPXS module (1 mounting plate + 5 screws and 1 clip)

#### Mounting Accessories for MPXS Micro Vacuum Pump Banks

- Part No. **MPXFIXC**  
DIN rail mounting kit for MPXS bank (2 clips + 2 fastening screws)
- Part No. **MPXFIXD**  
Front panel mounting kit for MPXS bank (2 plates + 4 fastening screws)

#### Connection Cables for MPXS Micro Vacuum Pumps

- Part No. **CCM8F6PCM12M5PL05**  
M8 6-pin female snap-in elbow / M12 5-pin male straight connectors, AWG24, PUR, length 0.5 m.
- Part No. **CCM86PCL2**  
M8 6-pin female snap-in elbow, AWG24, PUR, length 2 m.

## Controlled Communicating Micro Vacuum Pumps

### Build Your Own Bank Assembly

To build a custom bank assembly containing different **MPXS** micro vacuum pumps, you need to order the parts below separately.

*Note: Custom bank assemblies come unassembled.*



### 1 Select the Bank End Set

#### MPXSETAL

##### Single Left Bank End Set:

- Head module on the left with 8x10 mm pressure connection and 10x12 mm exhaust collector.
- Tail module on the right (simple).

→ For a bank of 1 to 4 MPXS micro vacuum pump modules with a 1.0 mm nozzle, and up to 8 modules with a 0.7 mm nozzle.

#### MPXSETAD

##### Double Bank End Set:

- Head and tail modules with 8x10 mm pressure connection and 10x12 mm exhaust collector.

→ For a bank of 1 to 8 MPXS micro vacuum pump modules.

### 2 Select the Micro Vacuum Pump Modules for Bank



**MPXS90X 10 S C16 P R2 F1 EB**

NOZZLE DIA.		GENERATOR CONTROL	BLOW-OFF
0.7 mm dia.	<b>07</b>	<b>S</b> Vacuum <b>NC</b> and blow-off <b>NC</b>	<b>F1</b> Standard blow-off
1.0 mm dia.	<b>10</b>	<b>V</b> Vacuum <b>NO</b> and blow-off <b>NC</b>	<b>F3</b> Adjustable powerful blow-off

### 3 Select the Assembly Screw Kit

#### Assembly Screw Kit for a Single Left Bank Version

<b>MPXSETVB1L</b>	For a bank of 1 MPXS module
<b>MPXSETVB2L</b>	For a bank of 2 MPXS modules
<b>MPXSETVB3L</b>	For a bank of 3 MPXS modules
<b>MPXSETVB4L</b>	For a bank of 4 MPXS modules
<b>MPXSETVB5L</b>	For a bank of 5 MPXS modules
<b>MPXSETVB6L</b>	For a bank of 6 MPXS modules
<b>MPXSETVB7L</b>	For a bank of 7 MPXS modules
<b>MPXSETVB8L</b>	For a bank of 8 MPXS modules

#### Assembly Screw Kit for a Double Bank Version

<b>MPXSETVB1D</b>	For a bank of 1 MPXS module
<b>MPXSETVB2D</b>	For a bank of 2 MPXS modules
<b>MPXSETVB3D</b>	For a bank of 3 MPXS modules
<b>MPXSETVB4D</b>	For a bank of 4 MPXS modules
<b>MPXSETVB5D</b>	For a bank of 5 MPXS modules
<b>MPXSETVB6D</b>	For a bank of 6 MPXS modules
<b>MPXSETVB7D</b>	For a bank of 7 MPXS modules
<b>MPXSETVB8D</b>	For a bank of 8 MPXS modules






#### Standalone Module

##### LATERAL INSTALLATION

2 x 4.2 mm dia.  
(for two Ø 4 mm through screws or bolts with large washers).

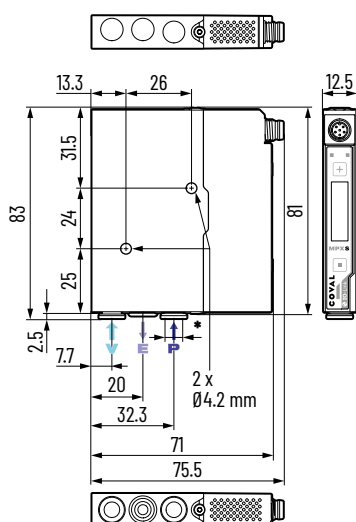


\* Push-to-connect:

- V (vacuum / suction cup): 4x6 mm
- E (exhaust collection, E option): 4x6 mm
- P (pressure / compressed air): 4x6 mm

##### MOUNTING FROM FRONT

2 x 4.5 mm dia.  
(for M4 screws)

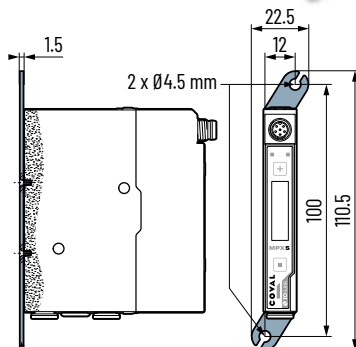


Individual mounting plate  
with its 4 fastening screws

For front panel installation, order the  
following installation kit:

Part No.: **MPXFIXA**  
(1 plate + 4 fastening screws)

##### INSTALLATION ON DIN RAIL

For a static  
installation (e.g., in  
a cabinet), an MPXS  
micro vacuum pump  
can be mounted on  
a DIN rail.

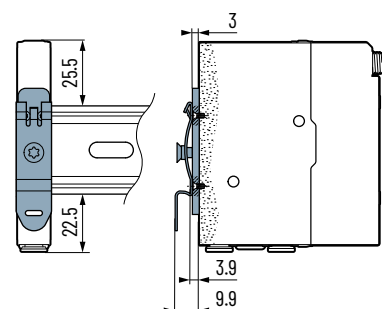


In this case, it must be equipped with  
an installation clip that is to be ordered  
separately:

Part No.: **MPXFIXB**  
(1 bracket + 1 clip + 5 fastening screws)

#### Bank

##### MPXS...B...LX VERSION

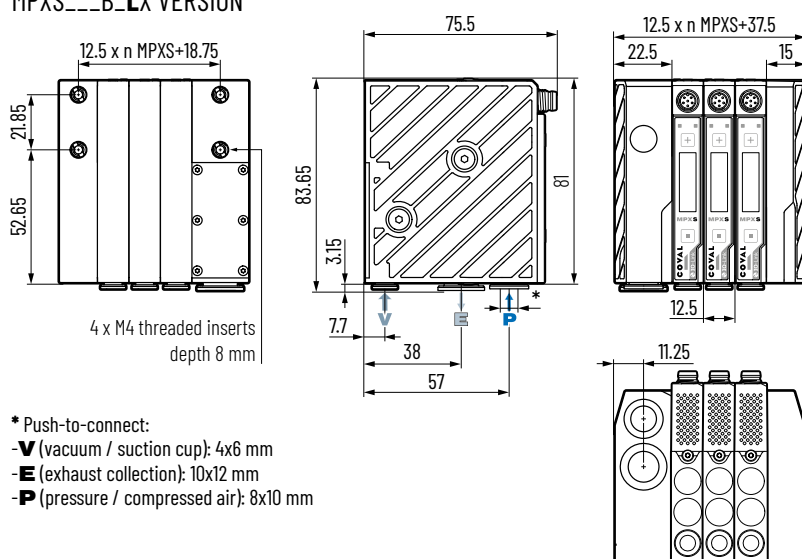

\* Push-to-connect:

- V (vacuum / suction cup): 4x6 mm
- E (exhaust collection): 10x12 mm
- P (pressure / compressed air): 8x10 mm

##### Dimensions of the MPXS\_F3 Option (Adjustable Powerful Blow-off)

The MPXS micro vacuum pumps in  
the F3 version feature an adjustment  
screw with a locking nut to adjust the  
blow-off power.




You can access 3D files of all COVAL products in formats compatible  
with the main CAD software on COVAL's website [www.coval.com](http://www.coval.com)

Note: All dimensions are in mm.






#### MPXS...B...DX VERSION

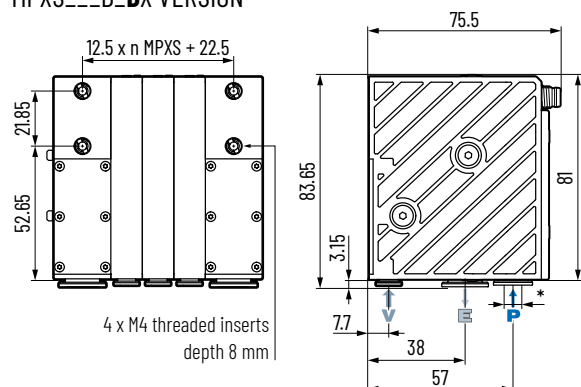

- \* Push-to-connect:  
**-V** (vacuum / suction cup): 4x6 mm  
**-E** (exhaust collection): 10x12 mm  
**-P** (pressure / compressed air): 8x10 mm

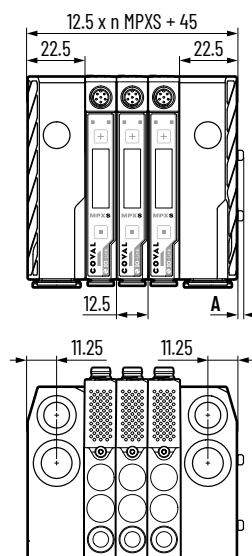


#### Dimensions

Part No.	A
MPXS...B1DX	0
MPXS...B2DX	3
MPXS...B3DX	0
MPXS...B4DX	3
MPXS...B5DX	0
MPXS...B6DX	3
MPXS...B7DX	0
MPXS...B8DX	0

#### Dimensions of the MPXS\_F3 Option (Adjustable Powerful Blow-off)

The MPXS micro vacuum pumps in the F3 version feature an adjustment screw with a locking nut to adjust the blow-off power.



Note: All dimensions are in mm.


#### MOUNTING FROM REAR

4 x M4 threaded inserts depth 8 mm




#### MPXS...B...LX VERSION

4 x M4 threaded inserts depth 8 mm



#### MPXS...B...DX VERSION

4 x M4 threaded inserts depth 8 mm




#### MOUNTING FROM FRONT

4 x 4.5 mm dia.  
(for M4 screws)

For front panel installation, order the following installation kit:

Part No.: **MPXFIXD**  
(2 plates + 4 fastening screws)

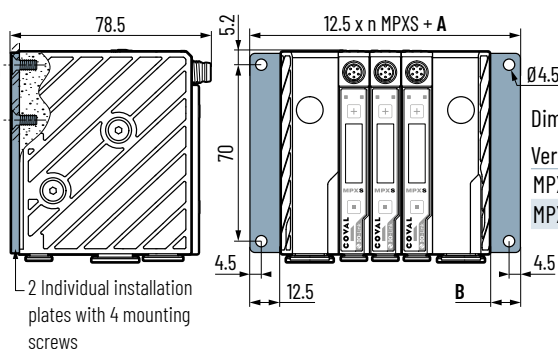

#### Dimensions


Version	A	B
MPXS...B...LX	66.3	16.25
MPXS...B...DX	70	12.5

#### INSTALLATION ON DIN RAIL

The bank can be mounted on a DIN rail for a static installation (e.g. in a cabinet).

In this case, it must be equipped with an installation clip that is ordered separately:

Part No.: **MPXFIXC**  
(2 clips + 2 fastening screws)

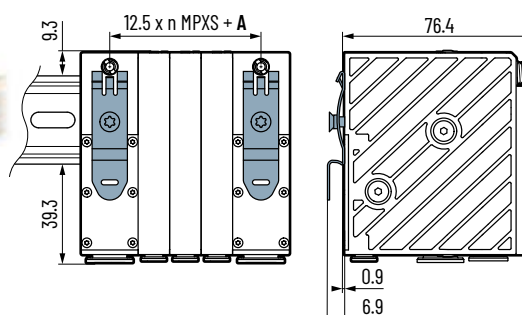

#### Dimensions

Version	A
MPXS...B...LX	18.75
MPXS...B...DX	22.5





#### General characteristics

- Supply: non-lubricated air, filtered to 5 microns, according to standard ISO 8573-1:2010 [3:4:3].
- Operating pressure: from 3.5 to 7 bar.
- Optimal dynamic pressure per module: 3.7 bar (*bank supply pressure must be adjusted according to the number of modules to ensure 3.7 bar dynamic pressure / module*).
- Standard blow-off (MPXS...F1): network pressure (blow-off flow rate of 7 NI/min at 3.7 bar).
- Adjustable powerful blow-off (MPXS...F3): network pressure with valve (flow rate adjustable from 16 to 55 NI/min at 3.7 bar).
- Pressure connection:
  - Standalone vacuum pumps: 4x6 mm\* push-to-connect with 200 µm filter screen.
  - Bank: 8x10 mm push-to-connect with 200 µm filter screen.
- Vacuum connection: 4x6 mm push-to-connect with 200 µm filter screen.
- Common collectable exhaust:
  - Standalone vacuum pumps: 4x6 mm push-to-connect.
  - Bank: 10x12 mm push-to-connect.
- Noise level:
  - Standalone vacuum pumps: max 66 dBA "without ASC". 0 dBA with ASC.
  - Bank of 1 to 4 vacuum pumps: max 74 dBA "without ASC". 0 dBA with ASC.
  - Bank of 5 to 8 vacuum pumps: max 82 dBA "without ASC". 0 dBA with ASC.
- Protection rating: IP40.
- Max. operating frequency: 4 Hz.
- Endurance: 30 million cycles.
- Weight:
  - Standalone vacuum pumps: MPXS...F1: 90 g, MPXS...F3: 94 g.
  - Bank:
    - MPXS\_B\_LX: 87 g (F1) or 91 g (F3) X number of stand-alone modules + 145 g for ends set.
    - MPXS\_B\_DX: 87 g (F1) or 91 g (F3) X number of stand-alone modules + 185 g for ends set.
- Operating temperature: from 0 to 50°C (32 to 122°F).
- Storage temperature: from -10°C to 60°C (14°F to 140°F)
- Materials: PA 6.6 GF, aluminum, stainless steel, brass, steel, NBR, PC+ABS, FKM, POM, PU. Housing materials comply with the requirements of UL standard 94 class HB.

#### Electrical controls

- Control voltage: 24V DC (regulated  $\pm 10\%$ ), PNP.
- Max. consumption: 60 mA (1.4 W) per vacuum and blow-off solenoid valve.
- Valve response time:
  - opening: 20 ms.
  - closure: 24 ms.

#### Integrated electronics

- 24 V DC power supply (regulated  $\pm 10\%$ ).
- Typical current consumption: < 35 mA / max. 50 mA.
- Measuring range: 0 to 99 % vacuum.
- Measurement accuracy:  $\pm 2\%$  of the range, compensated for temperature.
- Protected against reversed wiring and polarity.
- Protection against short circuits.
- Inputs switching type: PNP.
- LEDs for visualization of the controls:
  - Model **MPXS\_S**, Vacuum pump with NC vacuum control and NC blow-off:
    - Green LED: vacuum control.
    - Orange LED: blow-off control.
  - Model **MPXS\_V**, Vacuum pump with NO vacuum control and NC blow-off:
    - No LEDs: vacuum control.
    - Both LEDs on: blow-off control.

#### Electrical connections

- One M8 connector 6-pin, Male, A-Coded.
- IO-Link or SIO (Standard Inputs Outputs) operation.

#### Analysis of ASC vacuum control system (Air Saving Control)

- Permanent monitoring of leakage level: abort or automatically return to ASC operation.

#### D01 configurable output signal "Object Gripped"

- PNP or NPN.
- NO or NC.
- Breaking capacity: 100 mA.
- Factory setting: PNP NO.
- Factory Set Value: 65% vacuum.

#### Diagnostics

- Instantaneous vacuum level (unit transmitted over IO-Link: mbar).
- Available information: Object gripped, object lost, regulation in progress, regulation fault.
- Cycle counters (vacuum, blow-off, object gripped, object lost, ASC, etc.).
- Alarm Counters (ASC Errors, Object Lost, Low/High Voltage, Simultaneous Commands, Overheating, Output Overcurrent).
- Supply voltage monitoring.
- Product item number and serial number.
- Error code log and operational status indicators.
- Software version.

#### Information displayed

- Gripping status indicator light: Green: object gripped, Yellow: ASC disabled due to vacuum leakage (object held in place), Red: object lost.
- High-visibility display:
  - Live vacuum level (in kPa, % vacuum, mbar, or inHg).
  - Warns when service life has been exceeded (> 30 million cycles).
  - Explicit fault messages.
  - Configurable display orientation: 0 - 180°.

#### Parameter settings

- Performed with 2-key keyboard.
- Choice of language: EN, FR, DE, IT, or ES.
- Choice of blow-off type:
  - Controlled.
  - Automatic timed, adjustable from 50 to 9950 ms.
- Choice of vacuum measurement unit (kPa, %, mbar, inHg).
- Monostable electrical manual controls.
- Object gripped (L1) and L2 control thresholds.
- Whenever required by the application, specific threshold and hysteresis settings that are different from the initial factory settings can be defined:
  - L1 = -65 kPa, h1 = -10 kPa, L2 = -75 kPa, h2 = -10 kPa.
- Activation/deactivation of the ASC control system.
- Activation/deactivation of the leakage level monitoring system (DIAG ECO) + adjustment of monitoring parameters.

#### Communication: IO-Link


- Revision: 1.1.4
- Transmission rate: COM1,2,3 up to 230.4 kbit/s.
- Min. cycle time: 1 ms.
- SIO mode: Yes.
- Process Data Input (PDI): 4 bytes.
- Process Data Output (PDO): 1 byte.
- IO device description file (IODD) available for download.

## Controlled Communicating Micro Vacuum Pumps Applications



The **MPXS** series micro vacuum pumps offer a new approach to vacuum handling in numerous domains: robotics, plastic molding, pharmaceutical, etc..

Optimized to serve small and medium sized suction cups, the **MPXS** series helps to simplify the installation while integrating all control functions into a single lightweight micro-module, placed close to the suction cups.

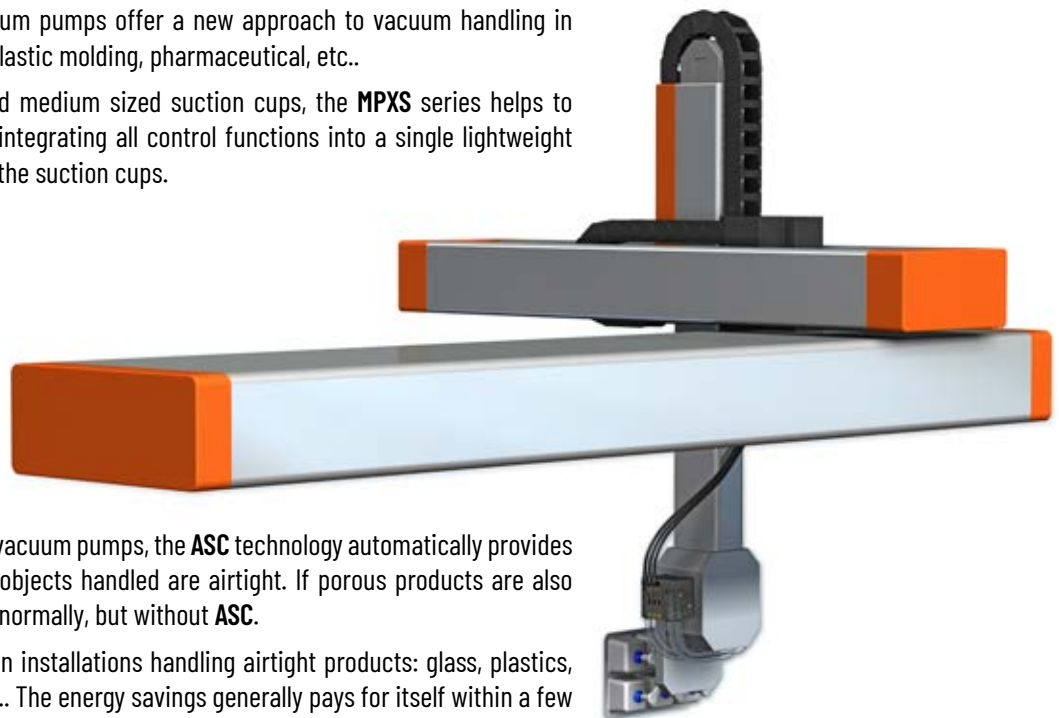

Integrated in all **MPXS** micro-vacuum pumps, the **ASC** technology automatically provides 60-99% energy savings when objects handled are airtight. If porous products are also handled, production continues normally, but without **ASC**.

The **MPXS** series is applied on installations handling airtight products: glass, plastics, coated wood, metal sheets, etc.. The energy savings generally pays for itself within a few months.

The **MPXS** series may also be applied to mixed machines that handle airtight and porous objects: the adaptation to the type of product is totally automatic.

### MPXE, MPXS: 2 Complementary Series

COVAL offers a variant of the MPXS controlled communicating micro vacuum pumps with the MPXE Series controlled micro vacuum pumps.

	MPXE	MPXS
Vacuum control (NC or NO)	■	■
Blow-off control (NC)	■	■
Automatic timed blow-off	/	■
Powerful blow-off (F3)	□	□
Electronic vacuum switch	■	■
Display	/	■
Vacuum level signal, analog output 5 V DC	■	/
Output signal "Object Gripped", Digital output 24 V DC (PNP/NPN)	/	■
Vacuum check valve	■	■
Automatic vacuum regulation (ASC)	/	■
Electrical Connectors:		
- JST 5-pin	■	/
- M8-6-pin male	/	■
Standalone or in Bank Module	■	■
IO-Link	/	■

■: Standard □: Option



**COVAL**  
vacuum managers

vacuum  
**components**



## A TECHNOLOGICAL PARTNER ON A GLOBAL SCALE

Located in the South of France, COVAL SAS designs, produces, and markets high-performance vacuum components and systems for industrial applications in all sectors worldwide.

An ISO 9001: V2015 certified company, COVAL innovates globally in vacuum handling. Our optimized components integrate intelligent and reliable functionalities, adapt to your industrial context, and safely improve your productivity.

With a strong spirit of innovation and technological advancements, the COVAL team is now recognized as an expert in developing reliable, economical, and productive custom solutions.

COVAL's references are found in major industrial sectors such as packaging, food processing, automotive, plastics, aerospace, and robotics, where vacuum handling is crucial for efficiency and productivity.

COVAL markets its products and services worldwide through its subsidiaries and authorized distributor network. Always attentive to its customers, COVAL supports the implementation of its solutions with a continuous and attentive relationship.

Visit the following section on COVAL's website:  
*contacts > commercial network*  
to view the most current list.



**COVAL S.A.S.**  
Head Office



**COVAL INC.**



**COVAL IBERICA**



**COVAL ITALIA**



**COVAL CHINA**

Distributed by:



**COVAL S.A.S.**  
Head Office  
ZA Les Petits Champs  
10 allée Jean-Baptiste Venturi  
26120 Montélier, France  
Phone: +33 (0)4 75 59 91 91  
Fax: +33 (0)4 75 59 91 05

**www.coval.com**