

VRS

Vacuum Rotary Connection



Industry-specific applications




The VRS Series Vacuum Rotary Connection, with its robust and lightweight design, provides an in line rotary connection for vacuum supplies. Its continuous rotation system avoids coiling of the hose and eliminates force constraints when used with collaborative robots.

Advantages

- Compact and lightweight
- Excellent mechanical resistance
- Continuous rotation
- Ideal for cobotic


Characteristics

Model	Flow Rate (NI/min)	Through bore Ø (mm)	Maximum speed (tr/min)	Connection	 (g)
VRS34MF	1500	16	40	G3/4"-M/F	135

Specifications

Materials	aluminum - NBR nitrile - steel
Temperature range	From -10 to +50°C

Dimensions

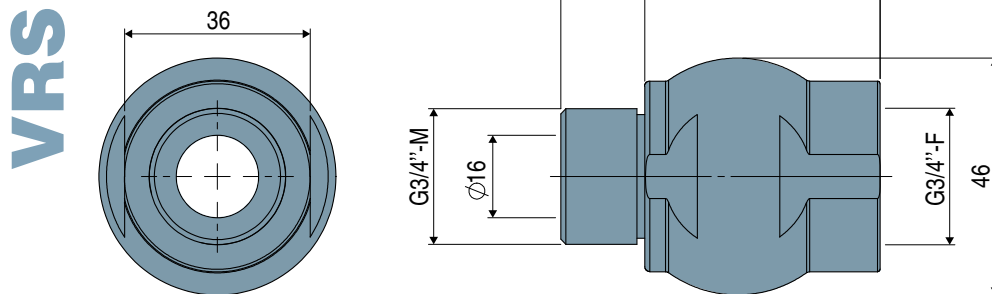

Note: All dimensions are in mm.
The values represent the average characteristics of our products.



To order please specify: VRS34MF

Accessory

Vacuum Rotary Union part n° VRU34A50